



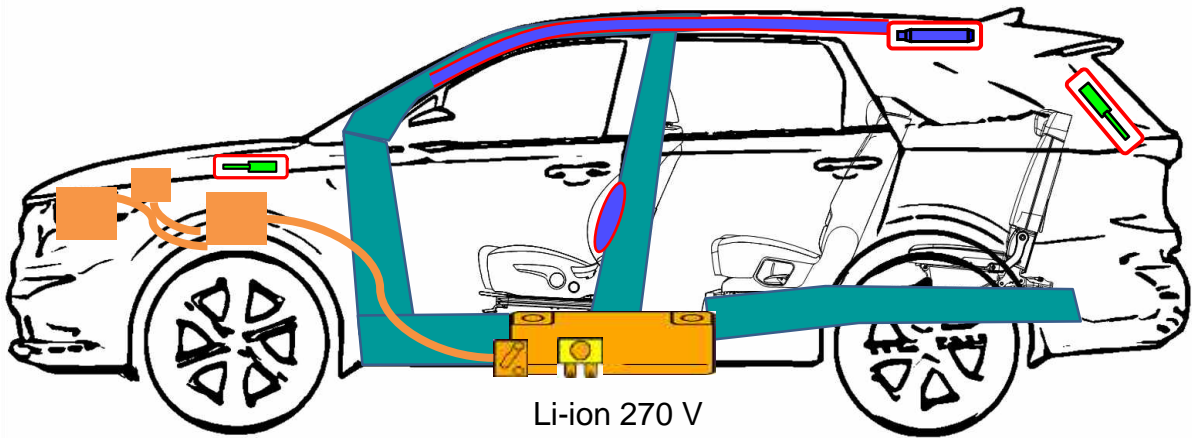

Kia Sorento

SUV, 4 doors, 5 & 7 seats
From August 2020

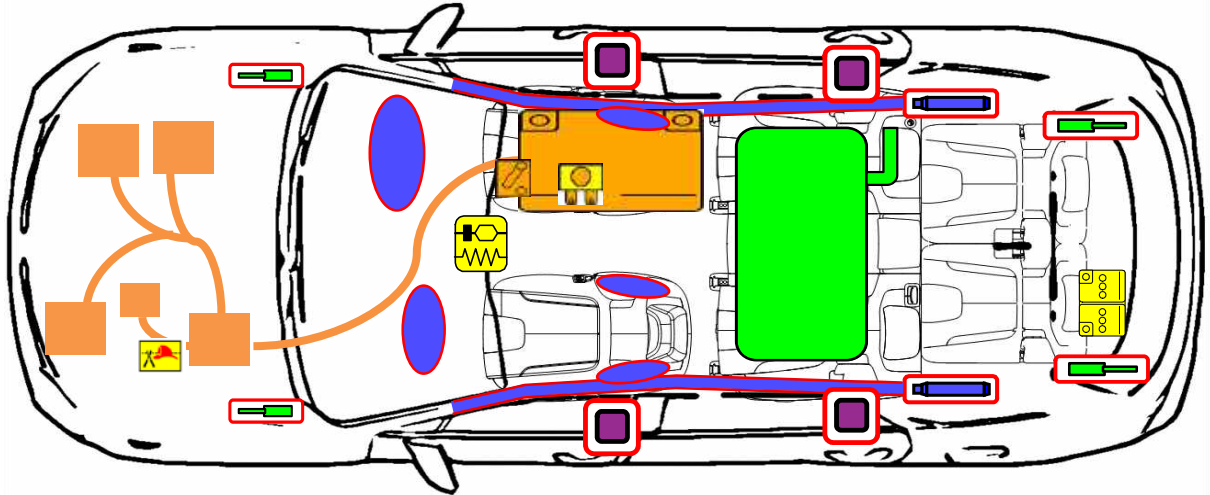

Li-ion 270 V

Reserved for holes (paper version)

| | | | | | | | | | |
|--|--------------------------------------|--|------------------------------------|--|-------------------------|--|--|--|-------------------------------------|
| | Airbag | | Stored gas inflator | | Seat belt pretensioner | | SRS control unit | | Pedestrian protection active system |
| | Automatic rollover protection system | | Gas strut/Preloaded spring | | High strength zone | | Zone requiring special attention | | |
| | Battery low voltage | | Ultra capacitor, low voltage | | Fuel tank | | Gas tank | | Safety valve |
| | High voltage battery pack | | High voltage power cable/component | | High voltage disconnect | | Fuse box disabling high voltage system | | Ultra capacitor, high voltage |

| | | | | |
|--|-----------------------|-------------|--------------|--------|
| | ID No. | Version No. | Version date | Page |
| | KNA-MQ4-RSH-01-202008 | 01 | 08/2020 | 1 of 4 |

1. Identification / recognition



2. Immobilisation / stabilisation / lifting

■ Immobilization

EPB



1. Push the P button.
2. Chock the wheels and pull the switch to set the parking brake.

■ Lifting positions at car underbody: ■



| | ID No. | Version No. | Version date | Page |
|--|-----------------------|-------------|--------------|--------|
| | KNA-MQ4-RSH-01-202008 | 01 | 08/2020 | 2 of 4 |

3. Disable direct hazards / safety regulations

■ Access to the battery




1a. Press the power tailgate open button for approx. one second

1b. Or carrying the smart key with you and press the tailgate handle switch

2. Battery in the trunk.

■ Disabling procedure



① Turn the ignition switch off

② Disconnect the negative(-) terminal

③ Disconnect the positive(+) terminal

4. Access to the occupants


■ Glass

1 : Laminated
2 + 3 : Tempered



■ Vehicle body

Hardened Steel

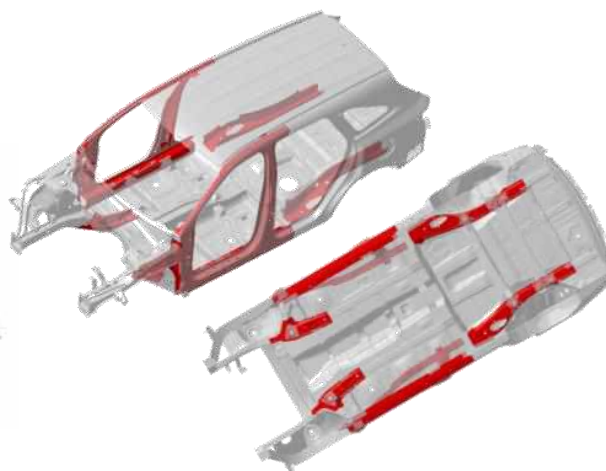

| | ID No. | Version No. | Version date | Page |
|--|-----------------------|-------------|--------------|--------|
| | KNA-MQ4-RSH-01-202008 | 01 | 08/2020 | 3 of 4 |

5. Stored energy / liquids / gases / solids

■ Fuel Tank

67ℓ

■ Battery



12 V




Li-ion 270 V

6. In case of fire

■ Gas Strut




Risk of missile effect of hood and trunk.

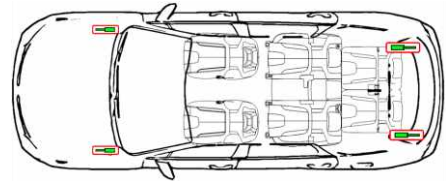


8. Towing / transportation / storage

OK :

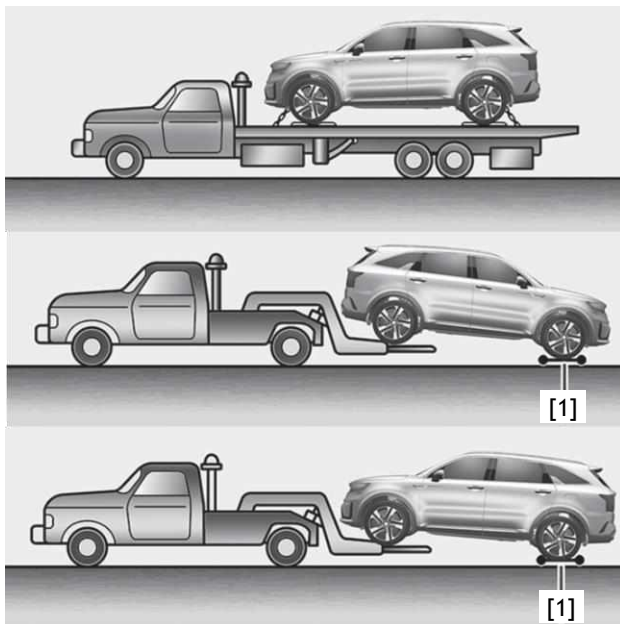

Not OK :

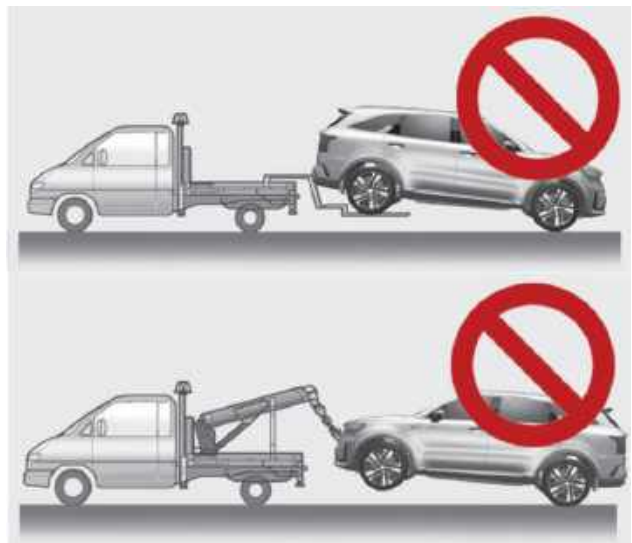

[1] : Dolly

| | ID No. | Version No. | Version date | Page |
|--|-----------------------|-------------|--------------|--------|
| | KNA-MQ4-RSH-01-202008 | 01 | 08/2020 | 4 of 4 |